


MACmount M 2716

MACmount

- is a pressure-sensitive fastening system consisting of a variety of cross linked, closed-cell, polyethylene foams in various thicknesses, densities and colours, and coated both sides with specifically formulated pressure-sensitive adhesives.

MACmount M 2716 consists of a 1,6 mm white, cross-linked, closed-cell, polyethylene foam coated on both sides with an acrylic adhesive. The product offers very high adhesion and cohesive properties.

MACmount M 2716 is produced in self wound format on a paper liner.

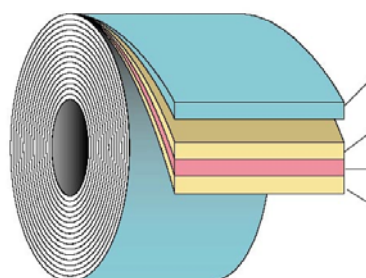

Siliconised brown paper
Side 2: Solvent based modified Acrylic adhesive
White PE Foam 1,6mm
Side 1: Solvent based modified Acrylic adhesive

A general purpose / high temperature resistant adhesive coated on a thicker foam

Adhesion with Substrates

Metal / Aluminium	High	Textile/Cotton	Medium
Glass / Ceramics	High	Rubber/EPDM	Medium
Painted Surface	High	Acrylic/PET	Medium
Wood/Board/Paper	High	Polystyrene	Medium
Soft PVC	Medium	PP/PE/PS	Medium
Rigid PVC	Medium	Smooth substrate	High
PC/ABS	Medium	Rough substrate	Medium

Resistant to water, detergents, alcohol, aliphatic and some aromatic solvents. Not recommended for use in contact with chlorinated solvents, ketones or esters.

2 years when stored at 15 to 25°C and ± 50 % relative humidity.

GENERAL INTRODUCTION

PRODUCT DESCRIPTION

TYPICAL APPLICATION

CHARACTERISTICS

RESISTANCE

SHELF LIFE

ADHESIVE DATA

	TYPICAL VALUES (*)	TEST METHOD
Peel 180°- 20 min (N/25mm) on stainless steel	> 18(**)	FTM 1
Peel (N/25mm) 23°C	> 18(**)	AFERA 4001
70°C	> 2(**)	
Shear on stainless steel (hours) 1kg-25 mm x 25mm	> 400	FTM 8
AFERA 4012 shear results are available on request		
(**) Foam cleavage		

CARRIER DATA

	TYPICAL VALUES (*)	TEST METHOD
Tensile (N/15mm) (min.)	MD 20 CD 15	DIN 53455
Elongation (%) (max.)	MD 300 CD 250	DIN 53455
Density	Medium	

TEMPERATURE RESISTANCE

Minimum application temperature	+ 5°C
End-use temperature range	-40°C to +100°C

For temperatures outside those quoted above, please consult with MACtac.

RELEASE LINER THICKNESS (Foam + adhesive)

Silicone paper brown of 90gr/sqm	ISO 536
1,7 mm	ISO 534

(*) Values given are typical and are not necessarily for use in specifications.

IMPORTANT NOTICE

All MACtac products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning MACtac products are based upon research which the Company believes to be reliable but such information do not constitute a warranty. Because of the variety of possible uses for MACtac products and the continuing development of new uses, the purchaser should carefully consider the fitness and performance of the product for each intended use and the purchaser assumes all risks in connection with such use. Seller shall not be liable for damages in excess of the purchase price of the product or for incidental or consequential damages. All specifications are subject to change without prior notice.

